

Single Dwelling Housing Development Code

Effective: 20 January 2023

Contents

Introduction			1
Element 1:	Build	ling and site controls	
	1.1	Plot ratio – standard blocks	3
	1.2	Number of storeys	
	1.3	Attics and basement car parking – standard blocks - RZ1	
	1.4	Height of buildings	4
	1.5	Building envelope - all large blocks; mid sized blocks approved on or	
		after 5 July 2013	
	1.6	Solar building envelope - all large blocks approved before 5 July 2013	
	1.6A		5
	1.7	Building envelope – mid sized blocks and compact blocks approved before 5 July 2013	6
	1.8	Bushfire	
	1.9	Front boundary setbacks – all blocks	
	1.10	Side and rear setbacks – all blocks	
	1.11	Setbacks less than 900mm	
	1.12	Garages and carports on or near side and rear boundaries – large blocks	
	1.13	Walls on or near side and rear boundaries – mid sized blocks	
	1.14	Allowable encroachments – setbacks	17
	1.15	Allowable encroachments – building envelopes	18
	1.16	Surveillance blocks	
	1.17	Cut and fill	
	1.18	Blocks between 500m2 and 550m2	18
Element 2:	Leas	e and development conditions	
	2.1	Approved lease and development conditions	19
Element 3:	Build	ling design	19
	3.1	Materials and finishes	
	3.2	Fencing – large blocks and mid sized blocks	
	3.3	Courtyard walls - large blocks	
	3.4	Courtyard walls – mid sized blocks	
	3.5	Front fences and courtyard walls – compact blocks	
Element 4:	Parki	ng and site access	23
	4.1	Pedestrian access	23
	4.2	Vehicle access	
	4.3	Parking	
Element 5:		nity	25
	5.1	Solar access – blocks which were approved or had a lease granted	
		before 5 July 2013	
		Solar access – blocks which were approved on or after 5 July 2013	
	5.2	Private open space	
	5.2A 5.3		
	5.3 5.4	Principal private open space Noise attenuation – external sources	
Element C.		onment	
Element 6:	Envir 6.1	Water sensitive urban design	
	6.2	Heritage	
	6.3	Tree protection	
	6.4	Erosion and sediment control	
Element 7:		Ces	
	7.1	Construction waste management – all zones	
	7.2	Utilities – all zones	
Annondin 4 D			
Appenaix 1 – Be	ounda	ry setback diagrams	39

Introduction

Name

The name of this code is Single Dwelling Housing Development Code.

Application

This code applies to single dwelling housing in all zones

National Capital Plan

Where a development is subject to special requirements under the National Capital Plan, or any relevant development control plan prepared under the National Capital Plan, the development must not be inconsistent with the special requirements or development control plan. Where any provision of this code is inconsistent with special requirements under the National Capital Plan, or any relevant development control plan prepared under the National Capital Plan, that provision has no effect.

Purpose

This code provides additional planning, design and environmental controls to support the objectives of the relevant zone.

It will be used by the *Authority* to assess development applications. It also offers guidance to applicants in designing development proposals and preparing development applications.

Structure

This code has a number of elements. Each element has one or more rules, and each rule has an associated criterion (unless the rule is mandatory). Rules provide quantitative, or definitive, controls. By contrast, criteria are chiefly qualitative in nature.

In some instances rules are mandatory. Such rules are accompanied by the words "This is a mandatory requirement. There is no applicable criterion." Non-compliance with a mandatory rule will result in the refusal of the development application. Conversely, the words "There is no applicable rule" is found where a criterion only is applicable.

Assessment tracks

Assessment tracks for particular developments are specified in the relevant zone development table.

Proposals in the code track must comply with all rules relevant to the development.

Proposals in the **merit track** and **impact track** must comply with a rule or its associated criterion, unless the rule is mandatory (ie. it has no related criterion). Where a rule is fully met, no reference to the related criterion needs to be made. Where there is a departure from a rule, or where a criterion only applies, the onus is on the applicant to demonstrate that the relevant criterion is satisfied, through supporting drawings and/or written documentation. In addition, the applicant for proposals in the impact track must justify any non-compliance by reference to the Statement of Strategic Directions.

Code hierarchy

Under the *Planning and Development Act 2007,* where more than one type of code applies to a development and there is inconsistency between provisions, the order of precedence is: precinct code, development code, and general code.

Related codes

Residential Zones Development Code

Applies to all forms of development in residential zones and makes reference to development codes and general codes that may also apply.

Precinct codes

Precinct codes may contain additional provisions that apply to specified *blocks*. Precinct codes are found in part 10.

Development codes

The following general codes, in particular, may be relevant.

Access and Mobility General Code

Crime Prevention through Environmental Design General Code

Home Business General Code

Parking and Vehicular Access General Code

Planning for Bushfire Risk Management General Code

Residential Boundary Fences General Code

Water Ways: Water Sensitive Urban Design General Code

General codes are found in part 11 of the Territory Plan.

Development must comply with the relevant codes (including other general codes that may not be listed above), subject to the code hierarchy outlined in the introduction to this code.

Definitions

Defined terms, references to legislation and other documents are italicised.

Definitions of terms used in this code are listed in part 13 of the Territory Plan or, for terms applicable only to this code, are associated with the respective rule or listed below.

Deep soil zone: an area of soil within a *development* that is unimpeded by *buildings* or *structures* above and below ground, and which has adequate dimensions to allow for the growth of healthy trees. Deep soil zones exclude *basements*, services, swimming pools, tennis courts and impervious surfaces including car parks, driveways, podium and roof areas.

Acronyms

EPA ACT Environment Protection Authority

TCCS Transport Canberra and City Services Directorate

Element 1: Building and site controls

Related code: Planning for Bushfire Risk Mitigation General Code

Rules	Criteria			
1.1 Plot ratio – standard blocks				
R1				
This rule applies to standard blocks.	This is a mandatory requirement. There is no			
Plot ratio is:	applicable criterion.			
 a) for <i>large blocks</i>, other than those referred to in item b) – not more than 50% 				
 b) for <i>blocks</i> created by subdivision of <i>dual</i> occupancy housing, the greater of – 				
 the <i>plot ratio</i> of the approved development at the time of creation of the new block, or 				
ii) the maximum <i>plot ratio</i> calculated for the original block (ie. before subdivision) under:				
 A) for RZ1- R6 of the Multi Unit Housing Development Code 				
B) for RZ2- R7 of the Multi Unit Housing Development Code				
c) in all other cases – not applicable.				
For the purpose of calculating <i>plot ratio</i> for this rule, the <i>gross floor area</i> includes $18m^2$ for each roofed car space provided to meet Territory requirements for resident car parking, but does not include <i>basement</i> car parking.				
1.2 Number of storeys				
R2				
The number of storeys does not exceed:	This is a mandatory requirement. There is no			
a) in RZ1, RZ2 and RZ3 – 2	applicable criterion.			
b) in RZ4 – 3.				
Rooftop plant that is set back and screened from the street is not included in the maximum number of storeys.				
1.3 Attics and basement car parking – standard blocks - RZ1				
R3				
In RZ1, on <i>standard blocks, attics</i> are not permitted where they are located directly above any 2 storey element of a <i>single dwelling house</i> .	This is a mandatory requirement. There is no applicable criterion.			

Rules	Criteria	
R4 In RZ1, on <i>standard blocks, basement</i> car parking is not permitted where located directly below any 2 storey element of a <i>single dwelling</i> <i>house.</i>	This is a mandatory requirement. There is no applicable criterion.	
1.4 Height of buildings		
 R5 Maximum <i>height of building</i> is: a) in RZ1, RZ2 and RZ3 – 8.5m b) in RZ4 – 12m. Note: For the purposes of this rule all height measurements are taken from datum ground level. 	C5 Buildings are consistent with the <i>desired</i> <i>character</i> .	
	sized blocks approved on or after 5 July 2013	
 R6 This rule applies to: a) <i>large blocks</i> b) <i>mid sized blocks</i> approved under an <i>estate development plan</i> on or after 5 July 2013 but does not apply to that part of a <i>building</i> that is required to be built to a boundary of the <i>block</i> by a precinct code. <i>Buildings</i> are sited wholly within the building envelope formed by planes projected over the subject <i>block</i> at 45° to the horizontal from a height of 3.5m above each side and rear boundary, except as required by the next rule. An example of a typical building envelope is shown at Figure 1. Note: For the purposes of this rule all height measurements are taken from datum ground level.	 C6 Buildings achieve all of the following: a) consistency with the <i>desired character</i> b) reasonable levels of privacy for <i>dwellings</i> on adjoining <i>residential blocks</i> and their associated <i>private open space</i>. 	
1.6 Solar building envelope - all large blocks	approved before 5 July 2013	
R7 This rule applies to <i>large blocks</i> approved before 5 July 2013 but does not apply to that part of a building that is required to be built to a boundary of the block by a precinct code. <i>Buildings</i> are sited wholly within the solar building envelope formed by planes projected over the subject <i>block</i> at X ^o to the horizontal from the height of the 'solar fence' on any <i>northern</i> <i>boundary</i> of an adjoining <i>residential block</i> . X ^o is the apparent sun angle at noon on the winter solstice.	 C7 Buildings achieve all of the following: a) consistency with the desired character b) reasonable solar access to dwellings on adjoining residential blocks and their associated private open space c) do not shadow the windows of habitable rooms (other than bedrooms) of any approved and constructed dwelling on an adjoining residential block at noon on the winter solstice d) do not overshadow the principal private 	

Rules	Criteria	
 Values for X are given in Table 1. The height of the 'solar fence' is: i) in the <i>primary building zone</i> – 2.4m ii) all other parts of the boundary – 1.8m This rule does not apply to those parts of a boundary where the adjacent part of the adjoining <i>residential block</i> comprises only an access driveway (i.e. a "battleaxe handle"). The previous rule applies to this part of the boundary. An example of a typical building envelope is shown at Figure 1. Note: For the purposes of this rule all height measurements are taken from datum ground level.	open space of any approved and constructed <i>dwelling</i> on an adjoining <i>residential block</i> to a greater extent than a 2.4m fence on the boundary at noon on the winter solstice.	
1.6A Solar building envelope - all blocks appro	ved on or after 5 July 2013	
R7A	C7A	
This rule applies to blocks approved under an estate development plan on or after 5 July 2013 but does not apply to that part of a building that is required to be built to a boundary of the block by a precinct code. Buildings are sited wholly within the solar building envelope formed by planes projected over the subject <i>block</i> at X° to the horizontal from the height of the 'solar fence' on any <i>northern boundary</i> of an adjoining <i>residential block</i> . X° is the apparent sun angle at noon on the winter solstice. Values for X are given in Table 1. The height of the 'solar fence' is: i) in the <i>primary building zone</i> – 3m ii) all other parts of the boundary – 2.3m This rule does not apply to those parts of a boundary where the adjacent part of the adjoining <i>residential block</i> comprises only an access driveway (i.e. a "battleaxe handle"). The previous rule applies to this part of the boundary. An example of a typical building envelope is shown at Figure 1. Note: For the purposes of this rule all height measurements are taken from datum ground level.	 Buildings achieve all of the following: a) consistency with the desired character b) do not overshadow the windows of habitable rooms (other than bedrooms) of any dwelling on an adjoining residential block at noon on the winter solstice to a greater extent than the height of the 'solar fence' on a northern boundary of that block c) do not overshadow any principal private open space on an adjoining residential block at noon on the winter solstice to a greater extent than the height of the 'solar fence' on a northern boundary of that block c) do not overshadow any principal private open space on an adjoining residential block at noon on the winter solstice to a greater extent than the height of the 'solar fence' on a northern boundary of that block d) reasonable levels of solar access for dwellings on adjoining residential blocks and their associated private open space e) where an adjoining residential block is not yet developed, the potential for reasonable solar access and privacy on the adjoining residential block(s) is maintained 	


Rules				Criteria		
1.7 Building envelope – mid sized blocks and			ng envelope – mid sized blocks and	l compact blocks approved before 5 July 2013		
R8				C8		
und 201	er an 3 or f	esta or w	lies to <i>mid sized blocks</i> approved ate development plan before 5 July which a <i>lease</i> was granted before	a)	dings achieve all of the following: consistency with the <i>desired character</i> reasonable levels of privacy for <i>dwellings</i> on	
buile	ding	that	but does not apply to that part of a is required to be built to a boundary by a precinct code.	b)	adjoining residential blocks and their associated private open space	
	-		e sited wholly within the building mprising:	c)	reasonable solar access to <i>dwellings</i> on adjoining residential blocks and their associated private open space	
a)			h facing boundaries' of adjoining <i>tial blocks</i> :		associated private open space	
	i)	wit	hin the <i>primary building zone</i> –			
		A)	planes projected at 45° from a height of 2m above the boundary			
		B)	where a nil setback is permitted, building elements may encroach beyond the building envelope provided they do not encroach beyond a plane projected at 30° from a height of 3m above the boundary			
 within the rear zone – planes projected at 30° from a height of 2m above each side and rear boundary 						
b)			ndaries other than 'north facing ries' of adjoining <i>residential blocks</i> :			
 i) within the <i>primary building zone</i> – planes projected at 45° from a height of 4.5m above each side boundary 						
	ii)	at	hin the <i>rear zone</i> – planes projected 30° from a height of 3.5m above ch side and rear boundary			
<u>For</u>	this	rule:				
North facing boundary means a boundary of a block where a line drawn perpendicular to the boundary outwards is orientated between 30° east of north and 20° west of north						
An example of a typical building envelope is shown at Figure 2.						
	Note : For the purposes of this rule all height measurements are taken from datum ground level.					

Rules	Criteria		
R9	C9		
 This rule applies to <i>mid-sized blocks</i> and <i>compact blocks</i> with one of the following characteristics: a) approved under an <i>estate development plan</i> before 5 July 2013 b) for which a <i>lease</i> was granted before 5 July 2013 Where a garage wall is located on, or setback from, the <i>northern boundary</i> of an adjoining <i>residential block</i>, a 1m encroachment of the wall is permitted vertically beyond the building envelope, provided the wall and roof element associated with the wall do not encroach beyond a plane projected at 30° from a height of 3m above the respective boundary. Refer Figure 2. Note: For the purposes of this rule all height measurements are taken from datum ground level.	 Buildings achieve all of the following: a) consistency with the <i>desired character</i> b) reasonable levels of privacy for <i>dwellings</i> and their associated <i>private open space</i> on adjoining <i>residential blocks</i> c) reasonable solar access to <i>dwellings</i> and their associated <i>private open space</i> on <i>adjoining residential blocks</i>. 		
1.8 Bushfire			
R10 Where identified in a precinct code or current and approved <i>lease and development conditions</i> as being within a bushfire prone area, buildings are constructed in accordance with the specified bushfire construction level of Australian Standard AS 3959 - <i>Construction of buildings in bushfire-</i> <i>prone areas.</i>	This is a mandatory requirement. There is no applicable criterion.		

Table 1 – Apparent sun angle (X) at noon on the winter solstice (21 June)

Aspect of <i>northern boundary</i> (bearing of line drawn perpendicular to the boundary)	Angle (X)
North 0° to <10° East	31 °
North 0° to <10° West	
North 10° to <20° East	32 °
North 10° to <20° West	
North 20° to <30° East	34 °
North 20° to <30° West	
North 30° to <40° East	36°
North 30° to <40° West	
North 40° to 45° East	39 °
North 40° to 45° West	

3.3 Residential Zones - Single Dwelling Housing Development Code Effective: 20 January 2023

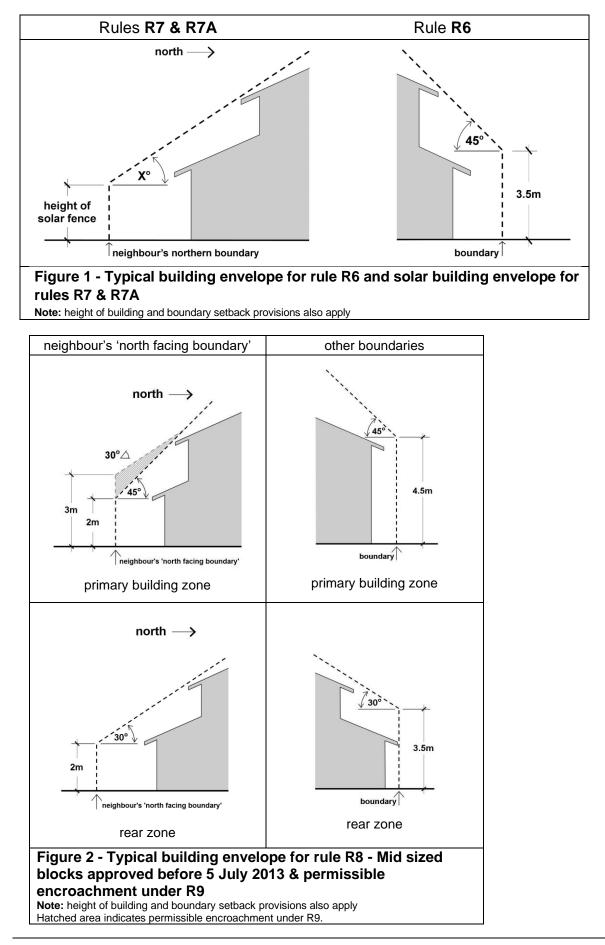

3.3 Residential Zones - Single Dwelling Housing Development Code Effective: 20 January 2023

Rules	Criteria	
.9 Front boundary setbacks – all blocks		
R11	C11	
Front boundary setbacks comply with the following:	Front boundary setbacks achieve all of the following:	
 a) <i>large blocks</i> - tables 2A, 2B or 2C, as applicable b) <i>mid-sized blocks</i> - tables 3A, 3B or 3C, as applicable c) <i>compact blocks</i> - tables 3A, 3B or 4, as applicable. The minimum boundary setbacks for corner <i>blocks</i> apply only to one street frontage nominated by the applicant or nominated in a precinct code as a <i>secondary street frontage</i>. Nomination by a precinct code takes precedence. Chamfers may be included in the <i>secondary street frontage</i>, but only if the length of the chamfer is less than the length of the front boundary. Note: Chamfers are ordinarily found at the corner of a <i>block</i> at the junction of streets. 	 a) consistency with the <i>desired character</i> b) the efficient use of the site c) reasonable amenity for residents d) pedestrian scale at street level e) space for street trees to grow to maturity. 	

Table 2A: Front boundary setbacks – large blocks in subdivisions originally_approved before 18 October 1993 (refer appendix 1 diagram 1)

		exceptions		
	minimum front boundary setback	minimum front boundary setback to secondary street frontage	minimum front boundary setback to open space or pedestrian paths wider than 6m	
lower floor level	6m	4m	4m	
upper floor level	6m	6m	4m	
garage	6m	5.5m	4m	

Table 2B: Front boundary setbacks – large blocks in subdivisions approved on or after18 October 1993 but before 31 March 2008 (refer appendix 1 diagram 2)

		exceptions		
	minimum front boundary setback	minimum front boundary setback to secondary street frontage	minimum front boundary setback to open space or pedestrian paths wider than 6m	
lower floor level	4m	4m	4m	
upper floor level	6m	6m	4m	
garage	5.5m with a minimum of 1.5 m behind the front building line	5.5m	4m	

Table 2C: Front boundary setbacks – large blocks in subdivisions approved on or after31 March 2008 (refer appendix 1 diagram 3)

		exceptions			
	minimum <i>front</i> <i>boundary</i> setback	minimum front boundary setback to secondary street frontage	minimum <i>front</i> <i>boundary</i> setback to open space or pedestrian paths wider than 6m	minimum <i>front</i> <i>boundary</i> setback to rear lane <i>front</i> <i>boundary</i> or pedestrian paths less than 6m wide	
lower floor level	4m	3m	4m	nil	
upper floor level	6m	3m	4m	nil	
garage	Minimum of 1.9 building line exc	5.5m 5m behind the front cept where there is a Il in the <i>front zone</i>	4m	nil	

 Table 3A: Front boundary setbacks – mid sized and compact blocks in subdivisions originally approved before 18 October 1993 (refer appendix 1 diagrams 4 and 9)

		exceptions		
	minimum front boundary setback	minimum front boundary setback to secondary street frontage	minimum front boundary setback to open space or pedestrian paths wider than 6m	
lower floor level	6m	3m	4m	
upper floor level	6m	3m	4m	
garage	6m	5.5m	4m	

Table 3B: Front boundary setbacks – mid sized and compact blocks in subdivisions approvedon or after 18 October 1993 but before 31 March 2008 (refer appendix 1 diagrams 5 and 10)

		exce	exceptions		
minimum front boundary setback		minimum front boundary setback to secondary street frontage	minimum front boundary setback to open space or pedestrian paths wider than 6m		
lower floor level	4m	3m	4m		
upper floor 6m level		3m	4m		
garage	5.5m with a minimum of 1.5 m behind the front building line	5.5 m	4m		

Table 3C: Front boundary setbacks – mid sized blocks in subdivisions approved on or after 31March 2008 (refer appendix 1 diagrams 6, 7 and 8)

		exceptions		
	minimum setback to front boundary	minimum setback to secondary street frontage	minimum setback to open space or pedestrian paths wider than 6m	minimum setback to rear lane or pedestrian paths less than 6m wide
all floor levels	4m	3m	3m	nil
articulation elements*– all floor levels	3m	not applicable	not applicable	not applicable
garage	5.5m Minimum of 1.5m behind the front <i>building line</i> except where there is a courtyard wall in the <i>front zone</i>		3m	nil

*Articulation elements can include verandahs, porches, awnings, shade devices, pergolas and the like (a carport is not considered an articulation element)

Table 4: Front boundary setbacks – compact blocks in subdivisions approved on or after 31March 2008 (refer appendix 1 diagrams 11)

		exceptions				
	minimum setback to front boundary	minimum setback to secondary street frontage	minimum setback to open space or pedestrian paths wider than 6m	minimum setback to rear lane or pedestrian paths less than 6m wide		
all floor levels	3m	3m	3m	nil		
garage	5.5m Minimum of 1.5m behind the front <i>building line</i> except where there is a courtyard wall in the <i>front zone</i>		3m	nil		

Note: see tables 3A and 3B for compact blocks in subdivisions approved before 31 March 2008

C12 Buildings and other structures are sited to achieve all of the following:
Buildings and other structures are sited to achieve all of the following:
 a) consistency with the <i>desired character</i> b) reasonable separation between adjoining developments c) reasonable privacy for <i>dwellings</i> on adjoining <i>residential blocks</i> d) reasonable privacy for <i>principal private open space</i> on adjoining <i>residential blocks</i> e) reasonable solar access to <i>dwellings</i> on adjoining <i>residential blocks</i> and their associated <i>principal private open space</i>.
C13
Buildings and other structures are sited to achieve all of the following: a) reasonable separation between adjoining
developments
 b) reasonable access for maintenance. d rear boundaries – large blocks
C14
 Garages and carports are sited to achieve all of the following: a) consistency with the desired character b) reasonable privacy for dwellings on adjoining residential blocks c) reasonable privacy for principal private open

Rules	Criteria
1.13 Walls on or near side and rear boundaries	s – mid sized blocks
R15	C15
 This rule applies to <i>mid sized blocks</i>, but does not apply to that part of the building that is required to be built to a boundary of the block by a precinct code applying to an <i>integrated housing development parcel</i> of which the block is a part. A wall with a setback of less than 900mm to a side or rear boundary complies with all of the following: a) not more than 13m in length b) extends no more than 2.5m into the rear zone 	 Walls are sited to achieve all of the following: a) consistency with the <i>desired character</i> b) reasonable privacy for <i>dwellings</i> on adjoining <i>residential blocks</i> c) reasonable privacy for <i>principal private open space</i> on adjoining <i>residential blocks</i>.

Table 5: Side and rear setbacks – large blocks (refer appendix 1 diagrams 1, 2 and 3)

	minimum side boundary setback within the <i>primary building zone</i>			minimum side boundary setback within the <i>rear zon</i> e	
	side boundary 1	side boundary 2	side boundary 1	side boundary 2	boundary setback
lower floor level – external wall	3m	1.5m	3m	1.5m	3m
upper floor level – external wall	3m	3m	6m	6m	6m
upper floor level – unscreened element	6m	6m	6m	6m	6m
garage or carport	3m	nil* ^	3m	nil* ^	3m

* see R14

^ does not apply to that part of a wall with a window of any sort

Table 6A: Side and rear setbacks – mid sized blocks in subdivisions approved before2 October 2009 (refer appendix 1 diagrams 4, 5 and 6)

		oundary setback ary building zone	minimum side b within the	minimum rear	
	side boundary 1	side boundary 2	side boundary 1	side boundary 2	boundary setback
lower floor level	3m	>15m frontage 1.5m <15m frontage nil ^	3m	1.5m	3m
upper floor level – external wall	3m	3m	6m	6m	6m
upper floor level – unscreened element	6m	6m	6m	6m	6m

^ does not apply to that part of a wall with a window of any sort

Table 6B: Side and rear setbacks – mid sized blocks in subdivisions approved on or after2 October 2009 (refer appendix 1 diagram 7)

		oundary setback ary building zone	minimum side b within the	minimum rear	
	side boundary 1	side boundary 2	side boundary 1	side boundary 2	boundary setback
lower floor level	1.5m	1.5m nil* ^	3m	0.9	3m nil** ^
upper floor level – external wall	3m	1.5m nil* ^ **	6m	6m	6m nil** ^
upper floor level – unscreened element	6m	6m	6m	6m	6m

* see R15

** only where specifically permitted under a precinct code.

^ does not apply to that part of a wall with a window of any sort

Table 6C - Alternative Side Boundary Setbacks (blocks must be nominated in a precinct code) (Refer appendix 1 diagrams 8A and 8B)

	South [^] Facing Boundary	North [^] Facing Boundary	East/ West^^^ Facing Boundary 1	East / West ^{^^^} Facing Boundary 2*
Lower floor level in the PBZ	1.5m 0m**	1.5m 4.0m+	1.5m	1.5m 0m**
Lower floor level in the RZ	1.5m	1.5m 4.0m+	1.5m	1.5m
Upper floor level – external wall in PBZ	1.5m	1.5m 4.0m+	1.5m	1.5m
Upper floor level – external wall in RZ	Not permitted	Not permitted	3.0m	3.0m
Upper floor level – unscreened element in the PBZ	6.0m	6.0m	6.0m	6.0m
Upper floor level – unscreened element in the RZ	Not permitted	Not permitted	6.0m	6.0m

South facing boundary means a boundary of a block where a line drawn perpendicular to the boundary outwards is orientated between south 30 degrees west and south 20 degrees east.

North facing boundary means a boundary of a block where a line drawn perpendicular to the boundary outwards is orientated between north 20 degrees west and north 30 degrees east.

** East/West boundary means a boundary of a block where a line drawn perpendicular to the boundary outwards is orientated either between east 20 degrees north and east 30 degrees south or between west 30 degrees north and west 20 degrees south.

* Boundary 2 may be stipulated in a precinct code.

** Provided the total length of the wall on the boundary does not exceed 13m (may extend up to 2.5m into the rear zone). Blank walls on boundaries may include walls to garages and non habitable rooms and cavity walls to habitable rooms.

The dwelling is required to be setback 4m from the north facing boundary for 50% or greater of the building length commencing from 4m or greater behind the front building line. The building length is measured 4m behind the front building line.

Table 7: Side and rear setbacks – compact blocks (refer appendix 1 diagrams 9,10 and 11)

	minimur	n side boundary sett	back	Minimum rear boundary setback
	side boundary 1 or longer side boundary of a corner block	side boundary 2	shorter side boundary of a corner block	
lower floor level – <i>external</i> <i>wall</i>	nil^	nil^	3m	3m nil* ^
lower floor level – unscreened element	1.5m	1.5m	3m	3m
upper floor level – <i>external</i> <i>wall</i>	nil**^	nil**^	3m	4m nil* ^
upper floor level – unscreened element	1.5m	1.5m	3m	4m
garage or carport	nil^	nil^	nil^	3m nil* ^

* only where specifically permitted under a precinct code. ** only where the lower floor level is built to the boundary

^ does not apply to that part of a wall with a window of any sort

Rul	es	Cri	teria
1.14	Allowable encroachments – setbacks		
R16		C16	3
rear	roachments into the minimum side and/or boundary setback are permitted for any of		dings and other structures achieve all of the owing:
	following building elements:	a)	consistency with the desired character
a)	an eave or roof overhang with a horizontal width of not more than 600mm	b)	reasonable levels of privacy on adjoining residential blocks for dwellings and their
b)	fascias, gutters, downpipes, rainwater tanks,		associated private open space
	chimneys, flues, domestic fuel tanks, cooling or heating appliances, light fittings, electricity and gas meters, aerials, antennae, unroofed pergolas, sun blinds	c)	reasonable solar access to <i>dwellings</i> on adjoining <i>residential blocks</i> and their associated <i>private open space.</i>
c)	unroofed terraces, landings, steps or ramps, none of which are more than 1m above finished ground level.		

Ru	les	Criteria
R17	,	C17
perr	roachments into the front setback are nitted for one or more of the following building nents:	Buildings and other structures achieve all of the following: a) consistency with the <i>desired character</i>
a) b) c) 1.1 5	an eave or roof overhang with a horizontal width of not more than 600mm fascias, gutters, downpipes, light fittings, sun blinds landings, steps or ramps, none of which are more than 1m above finished ground level. Allowable encroachments – building enve	 b) reasonable levels of privacy on adjoining residential blocks for dwellings and their associated private open space c) reasonable solar access to dwellings on adjoining residential blocks and their associated private open space.
spe	proachments outside the building envelope cified in this element are permitted for one or e of the following: flues chimneys antennae aerials cooling appliances heating appliances.	 Buildings and other structures achieve all of the following: a) consistency with the <i>desired character</i> b) reasonable levels of privacy on adjoining <i>residential blocks</i> for <i>dwellings</i> and their associated <i>private open space</i> c) reasonable solar access to <i>dwellings</i> on adjoining <i>residential blocks</i> and their associated <i>private open space</i>
1.16	Surveillance blocks	
app sur\ abo) ere identified in a precinct code or current and roved <i>lease and development conditions</i> as a veillance block, provide <i>habitable room</i> (s) ve the garage with windows facing and rlooking the rear lane.	This is a mandatory requirement. There is no applicable criterion.
1.17	7 Cut and fill	
cut side leve with Dat	total change in ground level resulting from or fill must not exceed 1.5m within 1.5m of a or rear boundary. The change in ground of is the cumulative total of all level changes in 1.5m of the boundary taken from the um Ground Level (DGL) to the new Finished und Level (FGL).	C20 Cut and fill is limited so that both of the following are achieved; a) reasonable access to sunlight on the block b) compatibility with the streetscape
1.18	Blocks between 500m2 and 550m2	
bloo less	provisions of this code relating to <i>mid-sized</i> oks apply to <i>block</i> s from 500m ² or greater but than 550m ² that are identified in a precinct e as <i>mid-sized blocks</i> .	This is a mandatory requirement. There is no applicable criterion.

2.1	2.1 Approved lease and development conditions				
R22	2	C22			
This rule applies to <i>blocks</i> affected by approved <i>lease and development conditions</i> that provide for one or more of the following matters:		The development meets the intent any approved <i>lease and development conditions</i> .			
a)	plot ratio				
b)	building envelope				
c)	building height				
d)	front street setback				
e)	side setback				
f)	rear setback				
g)	building design				
h)	materials and finish				
i)	interface				
j)	vehicle access				
k)	parking				
I)	solar access				
m)	private open space				
n)	water sensitive urban design				
o)	landscaping.				
the ove	roved <i>lease and development conditions</i> for matters listed above shall take precedence r the provisions of this code, but only to the ent of any inconsistency.				

Element 3: Building design

Related legislation: Common Boundaries Act 1981

Note: Under the *Building Act 2004* most buildings need to meet the requirements of the Building Code of Australia. For certain classes of buildings, this will include prescribed energy requirements.

Rules	Criteria		
3.1 Materials and finishes			
R23	C23		
Structures, plant and equipment situated on the roof are not visible from the street frontage or other unleased territory land unless exempt under <i>Planning and Development Act 2007</i> .	 Structures and plant and equipment situated on the roof that are not exempt under <i>Planning and Development Act 2007</i> achieve all of the following: a) do not diminish the value of the <i>streetscape</i> b) do not diminish residential amenity of neighbouring <i>block</i>s. 		

Rul	es	Criteria		
3.2	Fencing – large blocks and mid sized bloc	cks		
R24		C24		
This bloc	rule applies to <i>large blocks</i> and <i>mid-sized</i> ks.	Fences comply with the Residential Boundaries Fences General Code.		
build	Is or fencing are not permitted forward of the ding line except where they comply with one hore of the following:			
a)	a previously approved estate development plan			
b)	a relevant precinct code			
c)	form a gate to a maximum height of 1.8m in an established, vigorous hedge			
d)	otherwise complies with this code (eg courtyard wall provisions)			
e)	is exempt under the <i>Planning and Development Act 2007</i> .			
3.3	Courtyard walls – large blocks			
R25		C25		
This	rule applies to large blocks.	Courtyard walls achieve all of the following:		
	rtyard walls forward of the building line	a) consistent with the desired character		
com a)	ply with all of the following: total length complies with one of the following i) not more than 50% of the width of the	 b) the dominance of the building's facade in the streetscape taking all of the following aspects of the proposed courtyard wall into account 		
	block	i) height		
	 ii) not more than 70% where the width of the <i>block</i> at the line of the wall is less than 12m 	ii) relationship to verge footpathiii) total proportion relative to the building width		
b)	setback from the front boundary not less than 50% of the minimum front setback applying to the <i>block</i>	iv) colour and design featuresv) transparencyvi) articulation		
c)	height does not exceed 1.8m	vii) protection of existing desirable		
d)	constructed only of brick, block or stonework, any of which may be combined with feature panels	landscape features viii) tree and shrub planting forward of the		
e)	incorporate shrub planting between the wall and the front boundary	wall c) do not obstruct sight lines for vehicles and pedestrians on public paths or driveways in		
f)	do not obstruct sight lines for vehicles and pedestrians on public paths on driveways in accordance with Australian Standard <i>AS2890.1- Off-Street Parking</i> .	accordance with Australian Standard AS2890.1- Off-Street Parking.		

Rules			Criteria		
3.4 Courtyard walls – mid sized blocks					
R26			C26	5	
This rule applies to mid-sized blocks.			Cou	ırtyar	d walls achieve all of the following:
	-	d walls forward of the building line	a)	con	sistent with the desired character
com		vith all of the following:	b)		dominance of the building's facade in
a)	hav i)	e a maximum total length of where the width of the <i>block</i> at the line of the wall is less than 12m – 70% of		asp acc	<i>streetscape</i> taking all of the following ects of the proposed courtyard wall into ount
		the width of the block		i)	height
	ii)	in all other cases - 50% of the width of the <i>block</i>		ii)	relationship to verge footpath
b)		e a minimum setback from the front		iii)	total proportion relative to the building width
		indary of not less than -		iv)	colour and design features
	i)	where the total length of the courtyard wall measured parallel to the front		V)	transparency
		street boundary does not exceed 6.5m		vi)	articulation
		and the courtyard wall does not exceed 1.5m in height - 1m		vii)	protection of existing desirable landscape features
	ii)	in all other cases – 50% of the minimum front setback applying to the block		viii)	tree and shrub planting forward of the wall
c)	do r	not exceed 1.8m in height	c)		not obstruct sight lines for vehicles and
d)		constructed of one of the following -		•	estrians on public paths or driveways in ordance with Australian Standard
	i)	only of brick, block or stonework, any of which may be combined with feature panels		AS2	2890.1- Parking facilities, part 1 off-street king.
	ii)	finished to match or complement the dwelling house			
e)		prporate shrub planting between the wall I the front boundary			
f)	ped acc	not obstruct sight lines for vehicles and lestrians on public paths on driveways in ordance with A2890.1- <i>The Australian</i> ndard for Off-Street Parking.			
3.5	Fr	ont fences and courtyard walls – compa	act bl	ocks	;
R27			C27	,	
		applies to compact blocks.	Cou	ırtyar	d walls achieve all of the following:
Courtyard walls forward of the building line		a)		sistency with the desired character	
	comply with all of the following:		b)		ninance of the building's facade in the
a)	hav i)	e a maximum total length of- where the width of the <i>block</i> at the line of the wall is less than 12m – 60% of the width of the <i>block</i>		asp	etscape taking all of the following ects of the proposed courtyard wall into ount: height
	ii)	in all other cases - 50% of the width of		ii)	relationship to verge footpath

3.3 Residential Zones - Single Dwelling Housing Development Code Effective: 20 January 2023

Rules			Crit	teria	
		the block		iii)	total proportion relative to the building
b)		e a minimum setback from the front		,	width
	bou	indary of not less than -		iv)	colour and design features
	i)	where the courtyard encloses north		V)	transparency
		facing <i>principal private open space</i> – 1m		vi)	articulation
	ii)	in all other cases – 2m		vii)	protection of existing desirable
-)	,				landscape features
c)	have a maximum height of -			viii)	1 5
	i)	where the courtyard encloses <i>principal private open space</i> – 1.5m			wall
	ii)	where both of the following apply	c)	-	t lines for vehicles and pedestrians on
	")	•		-	lic paths or driveways in accordance
		 A) the courtyard encloses principal private open space 			Australian Standard AS2890.1- Parking lities, part 1 off-street parking.
		B) the <i>block</i> is a corner <i>block</i> – 1.8m			
	iii)	in all other cases – 1.2m			
d)	con	nply with one or more of the following -			
	i)	constructed of brick, block or stonework, any of which may be combined with feature panels			
	ii)	constructed and finished to match or complement the single dwelling house			
e)	ped acc	vide for sight lines for vehicles and lestrians on public paths on driveways in ordance with A2890.1- <i>The Australian</i> <i>ndard for Off-Street Parking</i> .			
R28	3		C28		
		pact blocks, front fences and side fences			d side fences achieve all of the following
	-	of the building line comply with all of the	a) consistency with the <i>desired character</i>		
follc	wing	i.	b)		ropriate proportions and character with
a)	do r	not exceed one of the following -	D)	•••	pect to -
	i)	where located adjacent to the		i)	height
		dwelling's principal private open space		ii)	relationship to verge footpath
		 – 1.5m in height 		iii)	total proportion relative to the building
	ii)	where located adjacent to the		,	width
		dwelling's principal private open space,		iv)	colour and design features
		where the <i>block</i> is a corner <i>block</i> -		V)	transparency and articulation
	:::)	1.8m in height		vi)	protection of existing desirable
L \	iii)	in all other cases – 1.2m in height	-	- I -	landscape features
b)	Stre veh	390.1- <i>The Australian Standard for Off-</i> eet Parking in relation to site lines for icles and pedestrians on public paths or reways.	c)	ped acco	not obstruct sight lines for vehicles and estrians on public paths or driveways in ordance with Australian Standard 2890.1- <i>Parking facilities, part 1 off-stree</i>
				narl	king.

Element 4: Parking and site access

Related code: Parking and Access General Code

Rul	es	Criteria		
4.1 Pedestrian access				
R29 For <i>block</i> s with a boundary to a rear lane, pedestrian access is provided from the street address.		This is a mandatory requirement. There is no applicable criterion.		
4.2	Vehicle access			
R30		C30		
	eway verge crossings comply with all of the wing:	Driveway verge crossings are endorsed by Department of Territory and Municipal Services.		
a)	1.2m horizontally clear of stormwater sumps and other services			
b)	1.5m horizontally clear of transformers, bus stops, public light poles			
c)	6m horizontally clear of the tangent point of the radius of the curve on a corner <i>block</i> (excluding locations with roundabouts and signalised intersections, which require separate formal approval and support from Asset Acceptance)			
d)	uphill grade of less than 17% as measured from the kerb; downhill grade of less than 12% as measured from the kerb			
e)	at a right angle to the kerb line with a maximum 10% deviation			
f)	for <i>large blocks</i> and <i>mid sized blocks</i> , a maximum of 5.5 m wide, and a minimum of 5m wide at the kerb, a minimum 3m wide at the front boundary, and a maximum width no greater than the width at the kerb			
g)	for <i>compact blocks</i> , 3m wide at the front street boundary			
h)	outside of the drip line of mature trees			
i)	minimum of 3m clear of small and new street trees			
j)	compliant with Australian Standard AS2890.1- <i>Parking facilities</i> as amended from time to time, having particular regard for sightlines and cross fall of the site			
k)	where there is a public footpath across the driveway verge crossing, the footpath is continuous (i.e. the footpath is to have			

Rules			Criteria		
I)	If the	edence). e existing footpath is replaced, it is structed at the same level in the same erial and colour as the original.			
4.3	Ра	rking			
 R31 The minimum number of car parking spaces provided on the <i>block</i> complies with the following: a) for a <i>single dwelling house</i> on <i>compact blocks</i> containing not more than 1 bedroom – 1 b) in all other cases - 2. 		on the <i>block</i> complies with the following: a <i>single dwelling house</i> on <i>compact</i> <i>ks</i> containing not more than	C31 Car parking provided on the <i>block</i> is adequate for residents and visitors.		
than For t	ensio the f i) ii) iii) iv) v) v) vi)	ons of car parking spaces are not less following: single roofed space - 6m x 3m double roofed space - 6m x 5.5m single unroofed space - 5.5m x 3m multiple unroofed spaces side by side - 5.5m x 2.6m parallel parking spaces - 6.7m x 2.3m 2.1m minimum clearance to any overhead structure. ule dimensions for roofed spaces are imensions.	 C32 Car parking spaces are sized to allow for all of the following: a) convenient access to the vehicle by the driver and passengers b) reasonable side and overhead clearance to vehicles c) reasonable access by vehicles (ie minimal turning movements). 		
	e foll are i) ii) do n at le is be com park requ	ng spaces on the <i>block</i> comply with all owing: not located in the <i>front zone</i> , except on: <i>compact blocks</i> any part of a driveway in tandem with another car parking space that is located behind the <i>front building line</i> . not encroach any property boundaries east one car parking space is roofed and ehind the <i>front zone</i> uply with sightlines for off-street car- king facilities and other relevant uirements in Australian Standard 1890.1- <i>Parking facilities</i> .	 C33 Car parking and related access on <i>block</i> achieve all of the following: a) reasonable amenity of neighbouring <i>residential blocks</i> b) consistency with the value of the <i>streetscape</i> c) public safety especially in relation to pedestrians and cyclists d) reasonable surveillance of parking spaces. 		

Rules	Criteria		
R34 In RZ1 and RZ2, on <i>standard blocks</i> ramps accessing <i>basement</i> car parking are behind the	C34 Ramps to <i>basement</i> car parking maintain the value of the <i>streetscape</i> and allow safe and		
building line, where the <i>block</i> is less than 30 m wide as measured at the street frontage. Ramps comply with the relevant requirements in Australian Standard AS2890.1- <i>Parking facilities.</i>	efficient vehicle and pedestrian movement.		
R35			
Car parking is not permitted on verges.	This is a mandatory requirement. There is no applicable criterion.		
R36	C36		
This rule applies to street frontages except frontages to laneways (rear loading blocks).	Garages or carports achieve all of the following: a) consistency with the <i>streetscape</i>		
The maximum total width of garage doors and	b) consistency with the <i>desired character</i>		
external width of carports is the lesser of the following:	c) compatibility with the façade of the associated <i>dwelling</i>.		
a) 6m			
b) 50% of the façade of the <i>dwelling</i> .			

Element 5: Amenity

Rules	Criteria		
5.1 Solar access – blocks which were approv	red or had a lease granted before 5 July 2013		
R37			
This rule applies to <i>blocks</i> approved under an <i>estate development plan</i> before 5 July 2013 or for which a <i>lease</i> was granted before 5 July 2013.	This is a mandatory requirement. There is no applicable criterion.		
The floor or internal wall of a daytime living area of a <i>dwelling</i> is exposed to not less than 3 hours of direct sunlight between the hours of 9am and 3pm on the winter solstice (21 June).			
For this rule:			
Daytime living area means a <i>habitable room</i> other than a bedroom			
Note : Overshadowing from vegetation is not considered when assessing solar access.			

Rules	Criteria			
5.1A Solar access – blocks which were approv	ed on or after 5 July 2013			
R37A	СЗ7А			
This rule applies to <i>blocks</i> approved under an <i>estate development plan</i> on or after 5 July 2013 for:	One or more daytime living areas is provided with reasonable access to direct sunlight between the hours of 9am and 3pm on the winter solstice			
 a) new dwellings b) additions and alterations, only if the addition or alteration affects: i) habitable room (see 1 below) ii) habitable room other than a bedroom (see 2 below) 1. Where the front boundary of the block is the northern boundary: 	(21 June). <u>For this criterion:</u> Daytime living area means a <i>habitable room</i> other than a bedroom.			
 A <i>habitable room</i> is provided with a minimum of 4m² of transparent vertical glazing that: a) is oriented between 45° east of north and 45° west of north; and b) is not overshadowed at noon on the winter solstice (21 June) by <i>buildings</i> and structures on the subject <i>block</i>, excluding the eaves of the building. 				
 2. For all other blocks: A <i>habitable room</i> other than a bedroom is provided with a minimum of 4m² of transparent vertical glazing that: a) is oriented between 45° east of north and 45° west of north; and b) is not overshadowed at noon on the winter solstice (21 June) by: i) buildings and structures on the subject <i>block</i>, excluding the eaves of the building ii) the 'solar fence' on the <i>northern boundary</i> of the subject <i>block</i>. 				
For this rule:				
 A. The height of the 'solar fence' is: i) in the <i>primary building zone</i> – 3m ii) all other parts of the boundary – 2.3m. B. A roofed outdoor area (e.g. an alfresco area) is not considered to be an eave. Note: Compliance with this rule may be demonstrated through plans, elevations and supporting documentation (e.g. shadow diagrams) showing that the required minimum area of glazing is not overshadowed. Note: Overshadowing from vegetation is not 				

Rules			Criteria		
5.2 Private open space					
R38		C38			
For <i>large blocks</i> approved under an <i>estate</i> <i>development plan</i> on land for which the original Crown lease was granted on or after 1 January 2020, <i>private open space</i> complies with all of the		<i>Private open space</i> provides residential amenity on the subject site and protects the residential amenity of adjoining sites by achieving all of the following:			
folic a)	bwing: has a minimum area equal to 60% of the	a)	limits site coverage of buildings and vehicle parking and manoeuvring areas		
	block area, less 50m ²	b)	provides space for planting		
b)	has a minimum dimension of 6m for an area not less than 10% of the block	c)	facilitates on-site infiltration of stormwater run-off		
c)	at least 50% of the minimum area specified in a) is <i>planting area</i> .	d)	provides outdoor areas that are readily accessible by residents for a range of uses and activities		
	 Private open space includes principal private open as required elsewhere in this element. 	e)	provides space for service functions such as clothes drying and domestic storage.		
R38	8A	C38	A		
For <i>large blocks</i> approved under an <i>estate</i> <i>development plan</i> before 1 January 2020, or land for which the original Crown lease was granted before 1 January 2020, private <i>open space</i> complies with all of the following:		To reduce urban heat island effects, retain water and maintain ecosystem services, and to provide residential amenity on the subject site and protect residential amenity of adjoining sites, <i>private</i> <i>open space</i> achieves all of the following:			
a)	has a minimum area equal to 60% of the block area	a)	limits site coverage of buildings and vehicle parking and manoeuvring areas		
b)	has a minimum dimension of 6m for an area not less than 10% of the block	b)	facilitates on-site infiltration of stormwater run-off		
c)	at least 30% of the block area is <i>planting area</i> , with a minimum dimension of 2.5m.	c)	provides substantial outdoor areas that are readily accessible by residents for a range of uses and activities		
	Note: Private open space includes principal private open space, as required elsewhere in this element.		provides space for service functions such as clothes drying and domestic storage		
		e)	provides planting areas that demonstrates:		
			 establishment of landscaping to provide substantial shade in summer and admit winter sunlight to outdoor and indoor living areas 		
			 enhancement of living infrastructure through water-sensitive urban design and providing adequate areas for deep soil zones for ground water recharge, canopy trees and vegetation. 		

Ru	es		Criteria		
R39			C39		
 For <i>mid-sized blocks</i> approved under an <i>estate development plan</i> for which the original Crown lease was granted on or after 1 January 2020, <i>private open space</i> complies with all of the following: a) a minimum area is not less than 40% of the block area, less 50m² 			 Private open space provides residential amenity on the subject site and protects the residential amenity of adjoining sites by achieving all of the following: a) limits site coverage of buildings and vehicle parking and manoeuvring areas 		
	a m i) ii) iii) at le in a :: Priva	inimum dimension as follows: blocks that are identified in a precinct code as an alternative boundary setback block – 4m for an area not less than 20% of the block area blocks less than 360m ² – 5m for an area not less than 10% of the block in all other cases - 6m for an area not less than 10% of the block area east 50% of the minimum area specified) is <i>planting area</i> .	 b) provides space for planting c) facilitates on-site infiltration of stormwater run-off d) provides outdoor areas that are readily accessible by residents for a range of uses and activities e) provides space for service functions such as clothes drying and domestic storage. 		
spac R39		equired elsewhere in this element.	С39А		
 For <i>mid-sized blocks</i> approved under an <i>estate development plan</i> before 1 January 2020, or land for which the original Crown lease was granted before 1 January 2020, <i>private open space</i> complies with all of the following: a) a minimum area is not less than 40% of the block area b) a minimum dimension as follows: i) blocks that are identified in a precinct code as an alternative boundary setback block - 4m for an area not less than 20% of the block area ii) blocks less than 360m² – 5m for an area not less than 10% of the block 			 To reduce urban heat island effects, retain water and maintain ecosystem services, and to provide residential amenity on the subject site and protect residential amenity of adjoining sites, <i>private</i> <i>open space</i> achieves all of the following: a) limits <i>site coverage</i> of buildings and vehicle parking and manoeuvring areas b) facilitates on-site infiltration of stormwater run-off c) provides substantial outdoor areas that are readily accessible by residents for a range of uses and activities d) provides space for service functions such as clothes drying and domestic storage e) provides <i>planting areas</i> that demonstrates: 		
	area Priva	in all other cases - 6m for an area not less than 10% of the block area east 20% of the block area is <i>planting</i> a, with a minimum dimension of 2.5m. ate open space includes principal private open equired elsewhere in this element.	 i) establishment of landscaping to provide substantial shade in summer and admit winter sunlight to outdoor and indoor living area ii) enhancement of living infrastructure through water-sensitive urban design and providing adequate areas for deep soil zones for ground water recharge, canopy trees and vegetation. 		

Rules	Criteria			
R40	C40			
For <i>compact blocks</i> approved under an <i>estate</i> <i>development plan</i> for which the original Crown lease was granted on or after 1 January 2020, <i>private open space</i> complies with all of the	<i>Private open space</i> provides residential amenity on the subject site and protects the residential amenity of adjoining sites by achieving all of the following:			
following: a) a minimum area is not less than 20% of the	a) limits <i>site coverage</i> of buildings and vehicle parking and manoeuvring areas			
block area	b) provides space for planting			
 b) at least 50% of the minimum area specified in a) is planting area. 	 facilitates on-site infiltration of stormwater run-off 			
Note: Private open space includes principal private open space, as required elsewhere in this element.	 d) provides outdoor areas that are readily accessible by residents for a range of uses and activities 			
	e) provides space for service functions such as clothes drying and domestic storage.			
R40A	C40A			
For <i>compact blocks</i> approved under an <i>estate</i> <i>development plan</i> before 1 January 2020, or land for which the original Crown lease was granted before 1 January 2020, <i>private open space</i> complies with the following:	To reduce urban heat island effects, retain water and maintain ecosystem services, and to provide residential amenity on the subject site and protect residential amenity of adjoining sites, <i>private</i> <i>open space</i> achieves all of the following:			
a) a minimum area is not less than 30% of the block area	 a) limits site coverage of buildings and vehicle parking and manoeuvring areas 			
b) at least 15% of the block area is <i>planting area</i> with a minimum dimension of 2.5m.	 b) facilitates on-site infiltration of stormwater run-off 			
Note: Private open space includes principal private open space, as required elsewhere in this element.	c) provides substantial outdoor areas that are readily accessible by residents for a range of uses and activities			
	d) provides space for service functions such as clothes drying and domestic storage			
	e) provides <i>planting areas</i> that demonstrates:			
	 establishment of landscaping to provide substantial shade in summer and admit winter sunlight to outdoor and indoor living areas 			
	 enhancement of living infrastructure through water-sensitive urban design and providing adequate areas for deep soil zones for ground water recharge, canopy trees and vegetation 			

Rules	Criteria		
5.2A Site coverage and tree planting			
R40B	C40B		
 This rule applies to <i>blocks</i> approved under an <i>estate development plan</i> before 1 January 2020, or land for which the original Crown lease was granted before 1 January 2020. <i>Site coverage</i> is a maximum of: a) for <i>large blocks</i>: 40% of the <i>block</i> area b) for <i>mid-sized blocks</i>: 60% of the <i>block</i> area c) for <i>compact blocks</i>: 70% of the <i>block</i> area. 	 Site coverage and vehicle parking and manoeuvring areas is limited to: a) maximise outdoor areas that are readily accessible by residents for a range of uses and activities b) provide adequate space for service functions such as clothes drying and domestic storage c) provide adequate planting area on the site. 		
 R40C This rule applies to <i>blocks</i> approved under an estate development plan before 1 January 2020, or land for which the original Crown lease was granted before 1 January 2020. <i>Development</i> provides a minimum level of tree planting in <i>deep soil zones</i>, with associated planting requirements as described in table 7a, consistent with the following: a) for <i>compact blocks</i>, at least one small tree b) for <i>mid-sized blocks</i>, at least two small trees c) for <i>large blocks</i> less than or equal to 800m², one small tree and one medium tree (or equivalent existing tree/s– see Table 7b) d) for <i>large blocks</i> more than 800m², at least: i) one medium tree and one large tree (or equivalent existing tree/s – see Table 7b), and ii) one additional large tree or two additional 800m² block area (or equivalent existing tree/s – see Table 7b). Note: Existing canopy trees being retained as part of 	 domestic storage c) provide adequate <i>planting area</i> on the site. C40C Tree planting provided in the development ensures: a) Planting or retention of suitably sized canopy trees in <i>deep soil zones</i>, including adequate dimensions for <i>deep soil zones</i> to support healthy canopy tree growth, and provide adequate room for canopy trees b) planting canopy trees of semi-advanced stock and reasonable heights at maturity. 		
Note: Existing canopy trees being retained as part of development may be considered to meet these requirements.			

ble 7a: Tree sizes and associated planting requirements

Tree size	Mature height		Minimum canopy diameter***	Minimum soil surface area dimension	Minimum pot size (litres)*	Minimum soil volume		
Small Tree	5-8m		4m	3m	45**	18m ³		
Medium Tree	8-12m		6m	5m	75**	42m ³		
Large Tree	>	12m	8m	7m	75**	85m ³		
		Canberr Plants a made ur included *Minimu **The m 45 litres ***Provid	otes: or the purposes of this table, a tree is defined as a woody perennial plant suitable for the anberra climate. Any new trees cannot be a plant described in schedule 1 of the Pest lants and Animals (Pest Plants) Declaration 2015 (No 1) or any subsequent declaration ade under section 7 of the Pest Plants and Animals Act 2005, unless the tree is cluded on the ACT tree register. <i>I</i> linimum pot size refers to the container size of new trees prior to planting. The maximum pot size for small, medium and large <i>eucalyptus sp.</i> trees if selected is 5 litres, with maximum height at planting of 2.5m and maximum trunk caliper of 3cm. *Provided the minimum canopy diameter of the respective tree size can be met, this an be counted as meeting the tree size requirement.					

Table 7b: Tree sizes - equivalents for existing trees

Tree size	Tree sizes - Equivalent
Small Tree	An existing tree of a larger size category can also substitute for a planting requirement for a smaller tree
Medium Tree	2 small existing trees
Large Tree	4 existing small trees or 2 existing medium trees or 1 existing medium tree plus 2 existing small trees

5.3	Principal private open space			
R41		C41		
At least one area of <i>principal private open space</i> on the block complies with all of the following:		<i>Principal private open space</i> achieves all of the following:		
a) b) c)	minimum area and dimensions specified in table 8. at ground level directly accessible from, and adjacent to, a <i>habitable room</i> other than a bedroom	a) b)	is proportionate to the size of the dwelling capable of enabling an extension of the function of the dwelling for relaxation, dining, entertainment, recreation, and it is directly accessible from the dwelling accommodates service functions such as	
d)	screened from adjoining public streets and public open space	C)	clothes drying and domestic storage	
e)	located behind the building line, except where enclosed by a courtyard wall	d)	is screened from public streets and public open space with pedestrian or cycle paths	
f)	is not located to the south, south-east or south-west of the dwelling, unless it achieves not less than 3 hours of direct sunlight onto 50% of the minimum principal private open space area between the hours of 9am and 3pm on the winter solstice (21 June).	e)	reasonable access to sunlight to enable year round use	
	e: Overshadowing from vegetation is not idered when assessing solar access.			

Table 8: Principal Private Open Space

Zone	Block type	Dwelling Size*	Minimum Area	Minimum Dimension
all	Compact	all	16m ²	4m
RZ1 RZ2	Mid sized Large	up to 105m ²	28m ²	4m
	Mid sized Large	105m ² or greater	36m ²	6m
RZ3 RZ4	Mid sized Large	all	24m ²	4m

* For the purpose of this table, *dwelling* size is defined as the floor area measured to the outside face of externals walls including internal walls between the living areas and *garage* (but excluding the *garage*).

Rules			Criteria		
5.4	Noise	e attenuation – external sources			
R42			C42		
This rule applies to all new dwellings (including in established areas), as well as extensions and alterations that add a habitable room exposed directly to the source of noise.			This criterion applies to all new <i>dwellings</i> (including in established areas), as well as extensions and alterations that add a <i>habitable room</i> exposed directly to the source of noise.		
	racterist	ock has one or more of the following ics:	A noise management plan must be provided where:		
	p	lentified in a precinct code as being otentially affected by noise from xternal sources		i)	A <i>block</i> is identified in a precinct code as being potentially affected by noise from external sources; or
	to 12 iii) is at	<i>djacent</i> to a road carrying or forecast o carry traffic volumes greater than 2000 vehicles per day o otherwise identified to be noise ffected		ii) iii)	A <i>dwelling</i> is located in the first row of housing near a road carrying or forecast to carry traffic volumes greater than 12000 vehicles per day; or A <i>block</i> is otherwise identified to be noise affected
	ellings sł owing:	hall be constructed to comply with the	Noise management plan requirements:		
1.	road ca and 25, a. dwe nea i.	arrying traffic volumes between 12,000 000 vpd – elling located less than 20m from the arside edge of the road: AS/NZS 2107:2000 - Acoustics – Recommended design sound levels and reverberation times for building interiors (the relevant satisfactory recommended interior design sound level) AS/NZS 3671 - Acoustics – Road	a) For other than road traffic noise - a noise management plan prepared by a member of the Australian Acoustical Society with experience in the assessment of noise, and endorsed by the EPA. The noise level immediately adjacent to the dwelling is assumed to be the relevant noise zone standard specified in the ACT Environment Protection Regulation 2005. The plan must indicate compliance with the relevant Australian standard.		
	nea i. ii.	Traffic Noise Intrusion Building Siting and Design. elling located more than 20m from the arside edge of the road: glazing is 6.38mm laminated glass or equivalent and fitted with acoustic seals other than brush seals any external doors are solid core and fitted with acoustic seals other than brush seals	Note	asse prep Acor asse ende resp mus Aust	road traffic noise - an acoustic essment and noise management plan, pared by a member of the Australian ustical Society with experience in the essment of road traffic noise, and prsed by the ACT Government entity ponsible for transport planning. The plan t indicate compliance with the relevant tralian standard. Indition of development approval may be imposed compliance with the endorsed noise management
	25,000 a) dwe	rrying traffic volumes greater than vpd – elling located less than 40m from the arside edge of the road:			
	i.	AS/NZS 2107:2000 - Acoustics – Recommended design sound levels			

Ru	les			Criteria
		ii.	and reverberation times for building interiors (the relevant satisfactory recommended interior design sound level) AS/NZS 3671 - Acoustics – Road	
			Traffic Noise Intrusion Building Siting and Design.	
	b)		elling located more than 40m from the rside edge of the road:	
		i.	glazing is 10.38mm laminated glass or equivalent and fitted with acoustic seals other than brush seals	
		ii.	any external doors are solid core and fitted with acoustic seals other than brush seals	
3.			her cases where a dwelling is affected	
	bу	i.	e from external sources- AS/NZS 2107:2000 - Acoustics – Recommended design sound levels and reverberation times for building interiors (the relevant satisfactory recommended interior design sound level)	
		ii.	AS/NZS 3671 - Acoustics – Road Traffic Noise Intrusion Building Siting and Design.	

Element 6: Environment

Water Ways: Water Sensitive Urban Design General Code

Rules			Criteria
6.1	Wa	ater sensitive urban design	
R43			
This	rule	applies to	This is a mandatory requirement. There is no
a)	all r	new single <i>dwellings</i>	applicable criterion.
b)	sec	ondary residences and	
c)	exte	ensions and alterations but does not	
	apply to:		
	i)	extensions of a size 50% or less of	
		existing floor area or	
	ii)	development where no new plumbing	
		is proposed	
The development complies with one of the			
following:		:	
	i)	Option A	
	ii)	Option B	

Rul	es		Criteria
	iii)	Option C	
For	this r	rule	
Opti	ion A	is:	
a)	on	compact blocks -	
	i)	no minimum water storage requirement	
	ii)	minimum ★★★ WELS rated plumbing fixtures	
b)	on <i>i</i>	mid-sized blocks -	
	i)	minimum on site water storage of water from roof harvesting is 2,000 litres	
	ii)	50% or 75m ² of roof plan area, whichever is the lesser, is connected to the tank	
	iii)	the tank is connected to at least a toilet, laundry cold water and external taps that are attached to the house. The connection will require a pump where it cannot be elevated sufficiently to give adequate pressure.	
c)	on I	large blocks up to 800m ² -	
	i)	minimum on site water storage of water from roof harvesting is 4,000 litres	
	ii)	50% or 100m ² of roof plan area, whichever is the lesser, is connected to the tank	
	iii)	the tank is connected to at least a toilet, laundry cold water and external taps that are attached to the house. The connection will require a pump where it cannot be elevated sufficiently to give adequate pressure.	
d)	on I	large blocks 800m ² or greater -	
,	i)	minimum on site water storage of water from roof harvesting is 5,000 litres	
	ii)	50% or 125m ² of roof plan area, whichever is the lesser, is connected to the tank	
	iii)	the tank is connected to at least a toilet, laundry cold water and external taps that are attached to the house. The connection will require a pump where it cannot be elevated sufficiently to give adequate pressure.	
Onti	ion B		
		ater system captures all bathroom and	
-	-	greywater and treats it to Class A	

Rules	Criteria
standard. The treated greywater is connected to	
all laundry cold water, toilet flushing and all	
external taps.	
Option C is:	
Evidence is provided that the development	
achieves a minimum 40% reduction in mains	
water consumption compared to an equivalent	
development constructed in 2003, using the on-	
line assessment tool or another tool. The 40%	
target is met without any reliance on landscaping	
measures to reduce consumption.	
Note: The online Single Residential Waterways	
Calculator can be found at:	
https://www.planning.act.gov.au/topics/design_bu	
ild/design-and-	
siting/water_efficiency/residential_calculator	
6.2 Heritage	
R44	
This rule applies to land containing places or	This is a mandatory requirement. There is no
objects registered or provisionally registered	applicable criterion.
under section 41 of the Heritage Act 2004.The	
authority shall refer a development application to	
the Heritage Council.	
Note: The authority will consider any advice from the Heritage Council before determining the application.	
6.3 Tree protection	
R45	
This rule applies to a development that has one	This is a mandatory requirement. There is no
or more of the following characteristics:	applicable criterion.
a) requires groundwork within the tree	
protection zone of a protected tree	
b) is likely to cause damage to or removal of	
any protected trees.	
The authority shall refer the development	
application to the Conservator of Flora and	
Fauna.	
Notes: 1. Under the <i>Planning and Development Regulation 2008</i> a	
development application for a <i>declared site</i> under the	
Tree Protection Act 2005, must be referred to the	
 Conservator of Flora and Fauna. The authority will consider any advice from the 	
Conservator or Flora and Fauna before determining the	
application in accordance with the Planning and	
Development Act 2007.	
3. Protected tree and declared site are defined under the Tree Protection Act 2005.	

Rules	Criteria	
6.4 Erosion and sediment control		
R46		
For sites less than 3,000m ² , development complies with the Environment Protection Authority, <i>Environment Protection Guidelines for</i> <i>Construction and Land Development in the ACT</i> , August 2007.	This is a mandatory requirement. There is no applicable criterion.	
R47		
For sites 3,000m ² or larger, the application is accompanied by an erosion and sediment control plan endorsed by the ACT Environment Protection Authority.	This is a mandatory requirement. There is no applicable criterion.	
Note: If an erosion and sediment control plan is required but not provided, the application will be referred to the ACT Environment Protection Authority before the determination of the application.		


Element 7: Services


Rules	Criteria	
Construction waste management – all zones		
R48		
 This rule applies to <i>residential</i> development that is likely to generate more than 20m³ of construction waste comprising one or more of the following: a) demolition waste b) construction waste 	This is a mandatory requirement. There is no applicable criterion.	
c) excavation material.		
The management of construction waste is to be endorsed by TCCS.		
TCCS will endorse waste facilities and management associated with the development if they comply with the current version of the <i>Development Control Code for Best Practice</i> <i>Waste Management in the ACT.</i>		
TCCS may endorse departures.		
Note: a condition of approval may be imposed to ensure compliance.		

Rules	Criteria	
7.2 Utilities – all zones		
R49		
This rule applies to any proposed encroachment into a registered easement.	This is a mandatory requirement. There is no applicable criterion.	
The encroachment is to be approved in writing by the relevant service provider.		

Appendix 1 – Boundary setback diagrams



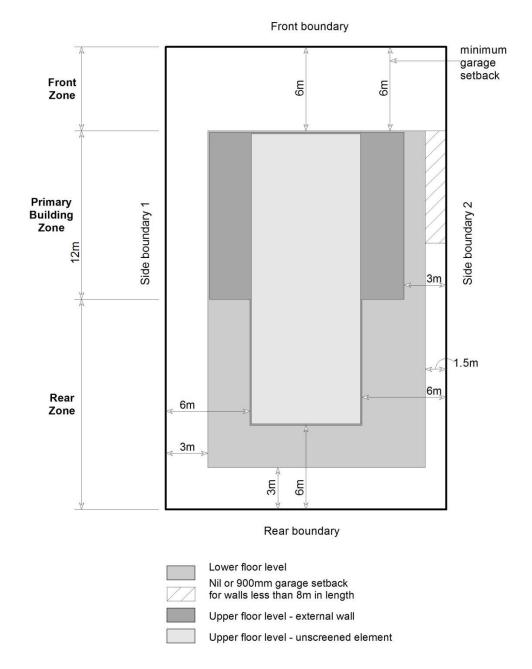





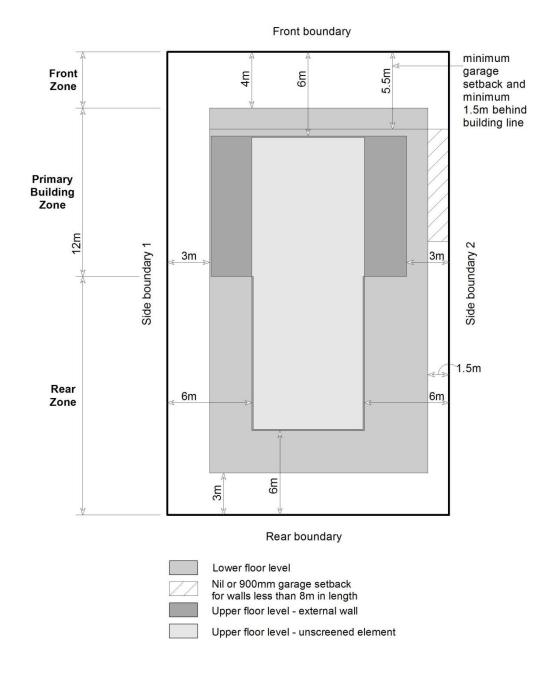


Diagram 3: Large blocks approved on or after 31 March 2008 (refer Tables 2C and 5)

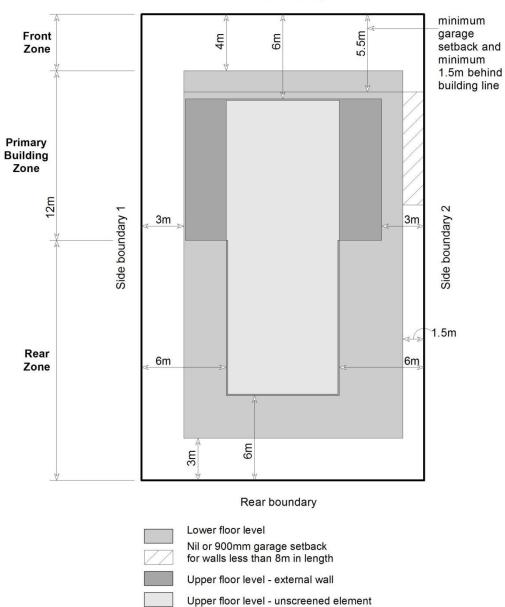

Front boundary

Diagram 4: Mid-sized blocks approved before 18 October 1993 (refer Tables 3A and 6A)

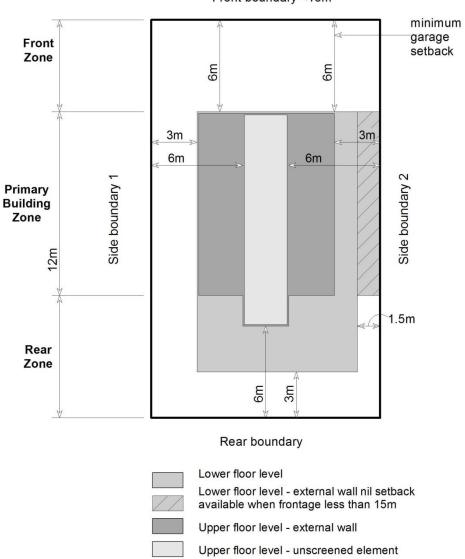

Front boundary <15m

Diagram 5: Mid-sized blocks approved on or after 18 October 1993 but before 31 March 2008 (refer Tables 3B and 6A)

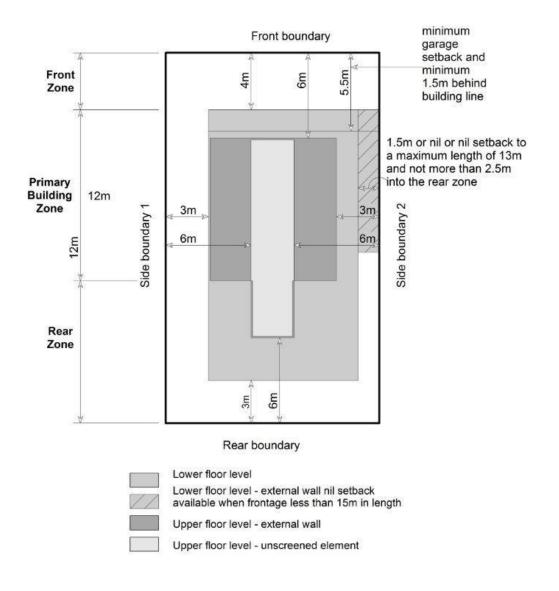


Diagram 6: Mid-sized blocks approved on or after 31 March 2008 but before 2 October 2009 (refer Tables 3C and 6A)

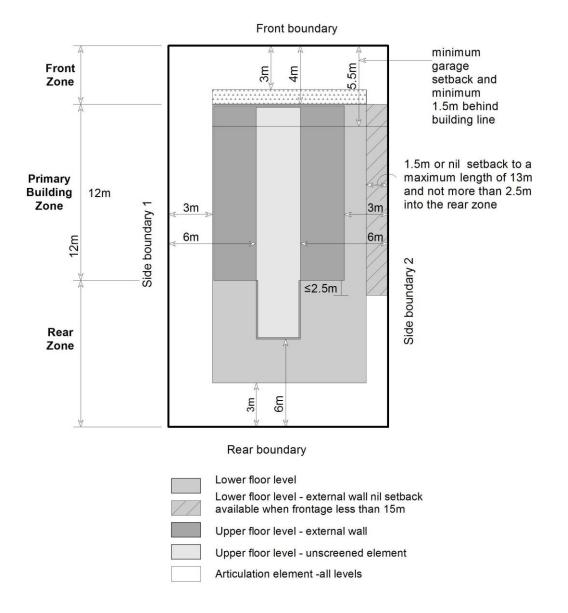


Diagram 7: Mid-sized blocks approved on or after 2 October 2009 (refer Tables 3C and 6B)

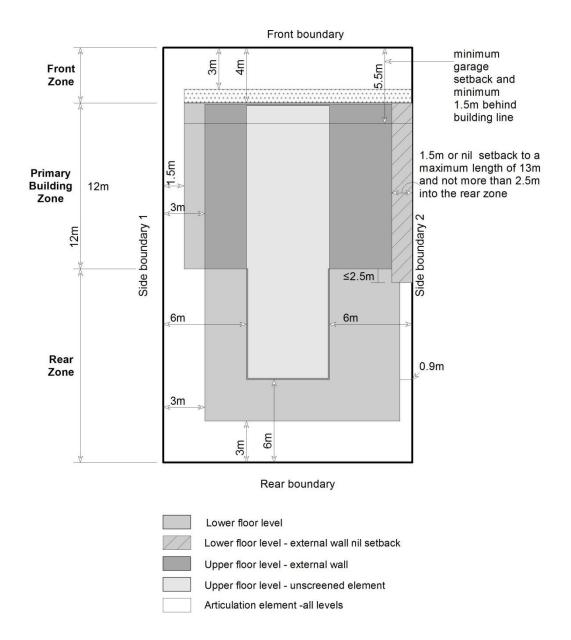
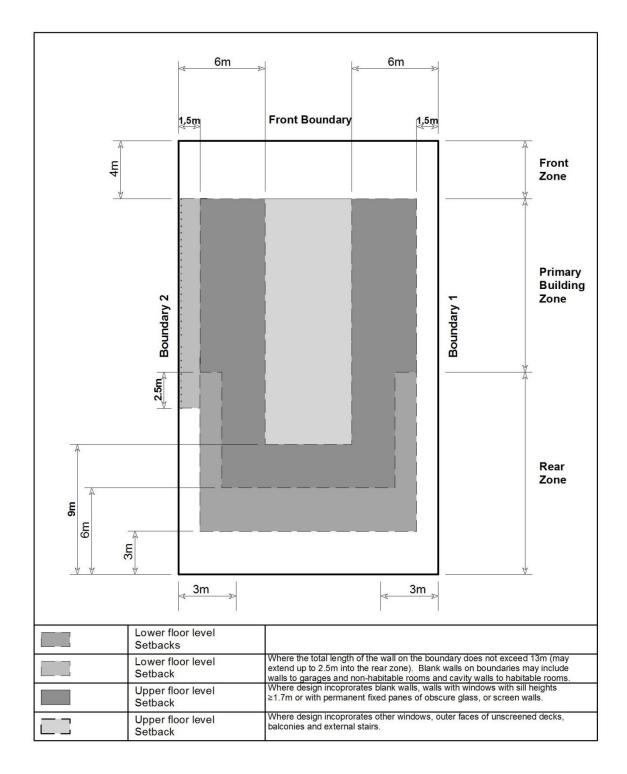



Diagram 8A: Mid-sized blocks approved on or after 2 October 2009 – alternate side and rear setbacks applicable only to nominated blocks in a precinct code (east and west facing side boundaries)





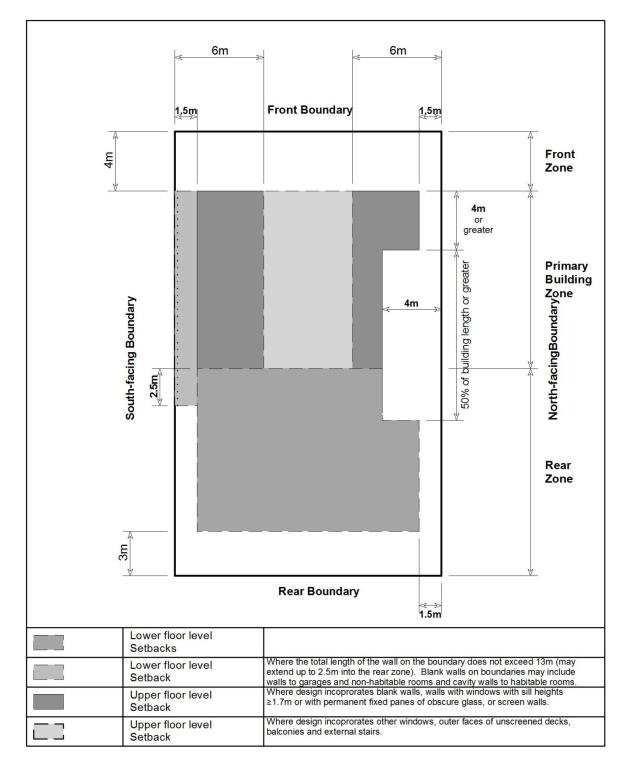
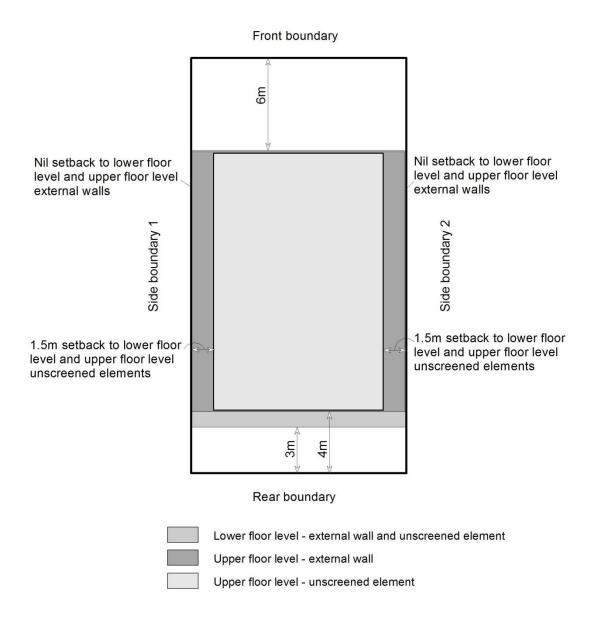


Diagram 9: Compact blocks approved before 18 October 1993 (refer Tables 3A and 7)



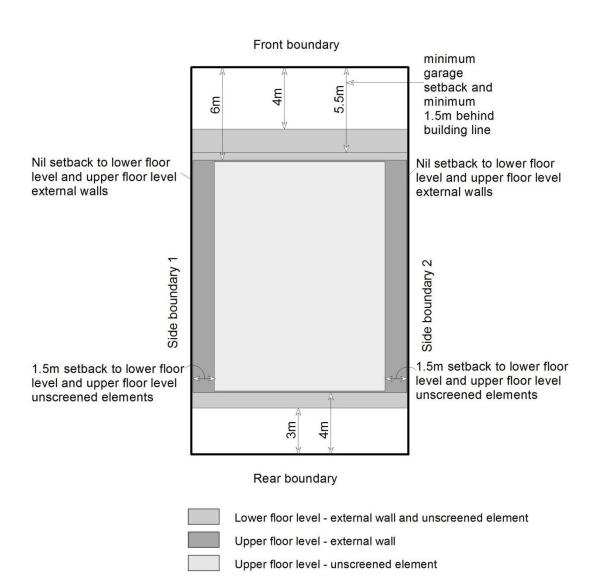


Diagram 10: Compact blocks approved on or after 18 October 1993 but before 31 March 2008 (refer Tables 3B and 7)

Diagram 11: Compact blocks approved on or after 31 March 2008 (refer Table 4 and 7)

